



.....

Braemar – a better kind of warm...

...now with more options for replacing an old gas heating system

.....

No matter how cold it gets outside this winter, keep your home wonderfully warm with Braemar from Seeley International, Australia's most efficient range of ducted gas heaters. The range includes the world's first six star and the world's first non-condensing five star ducted gas heaters – and now, the new THD series that's specially designed to replace some popular old heater models. The THD heater dimensions fit perfectly into the space used by these old heaters – making installation even quicker and easier!




Transforming global energy-efficiency into an art form!

The THD series comes pre-fitted with brackets on the base to suit existing supply/return air plenum boxes. Plus, the heater is supplied with a gas inlet pipe to match the existing gas supply location.

Braemar's THD range includes three, three-star models and features all the benefits that Braemar ducted gas heating is famous for – including:

- Advanced engineering, delivering easier and more efficient operation
- Softair™ fan system
- Multi-level safety controls as standard
- Electronic ignition and flame sensing
- Home/Away setting (if used in conjunction with the optional Spectrolink Controller)
- InShot Burner™
- A comprehensive, factory-backed warranty

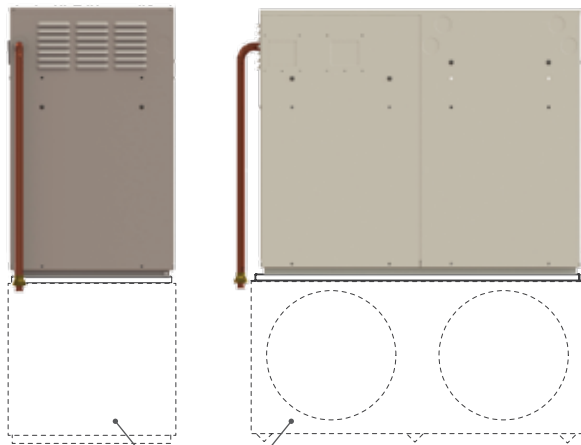

Existing supply/return air plenum box.



Manual digital controller



Spectrolink controller

Features

- Optional Spectrolink™ controller^o
- Manual digital
- Home and Away function*
- Programmable settings*
- Manual operation
- Softair™ function
- Thermostatically controlled
- Colorbond® cabinet
- External models
- Inshot burner
- Technologically advanced heat exchanger
- Single point ignition
- Self diagnostics*
- Operate cooling*
- Back-lit controller
- Electronic ignition
- Electronic flame sensing

^oReduced functionality.

*Only available with Spectrolink Multizone Controller.

Model	Dimensions (mm)			Weight (kg)	Star rating	Capacity (MJ/hr)	Airflow (l/sec@100Pa)	Supply & return duct diameter (mm)	Output (kW)	Controller type	
	Length	Width	Height							Standard	Spectrolink
THD315	770	385	635	47	3.7	60	440	N/A – down discharge	14	Standard	Optional
THD320	770	385	635	50	3.7	80	490	N/A – down discharge	18	Standard	Optional
THD330	880	510	650	70	3.7	122	880	N/A – down discharge	28	Standard	Optional

Bracket dimensions (to fit existing supply/return air plenum box) for THD315/THD320 – 770mm (W) x 395mm (D) and THD330 – 880mm (W) x 565mm (D)

For more information about Braemar ducted gas heating, check out the brochure or visit braemar.com.au



Seeley International Pty Ltd
ABN 23 054 687 035

112 O'Sullivan Beach Road
Lonsdale, South Australia 5160

Phone (08) 8328 3850

Fax (08) 8328 3951

Email marketing@seeleyinternational.com

Web seeleyinternational.com